


APPROVAL LOGO

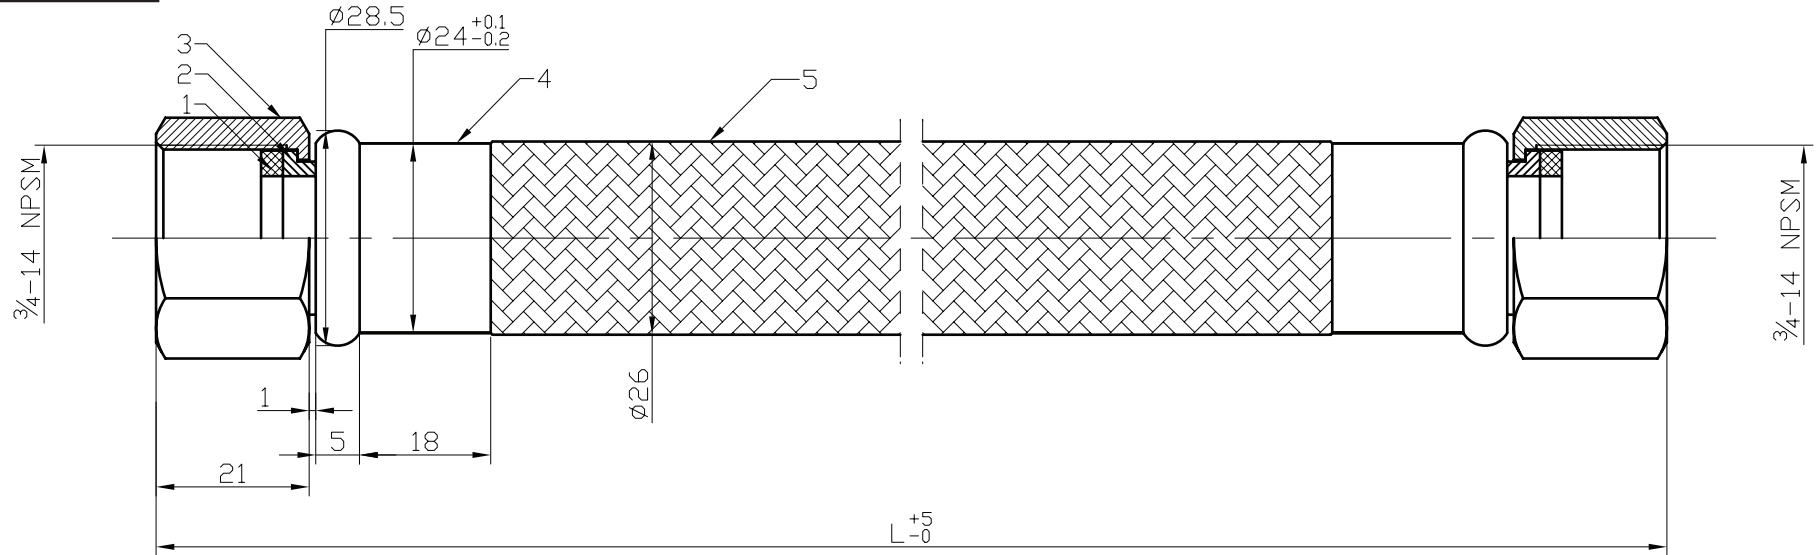

TECH REQUIREMENT :

1. No special note, the dimension tolerance is $\pm 0.15\text{mm}$, angle to be within $\pm 30^\circ$
2. The part surface must be clear, no oil, no burrs
3. Tolerance of the axiality: ± 0.1
4. Burst pressure @ 23°C : $\geq 8.5\text{MPa}$
5. The inner tube of this hot water hose is Santoprene, Max Temperature 82°C

5	FP14140250001	SS304 KITTEDHOSE	1	Santoprene TM TPC/SS304	0.20x10
4	FL601028800101	FERRULE	2	H62	28.8x23(2.5)
3	FL101003402301	NUT	2	HPb59-3	S29xH21x21
2	FL301003401200	BRASS CORE	2	HPb59-3	19xH32x20.5
1	FL701023500102	WASHER	2	EPDM	23.5xH3x15
NO.	DRAWING NO.	DESCRIPTION	QTY	MATERIAL	REMARK

STAINLESS STEEL KNITTED ASSEMBLY

3/4" X F 3/4"